

2/COR/0001

CARACTERÍSTICAS GENERALES

- 10A - 2200W.
- Corte instantáneo por alta tensión.
- Corte retardado por baja tensión (7 segundos).
- Controlado a relé.
- Reconexión automática.
- Supresor de transitorios de línea.
- 3 indicadores luminosos para el estado de funcionamiento.

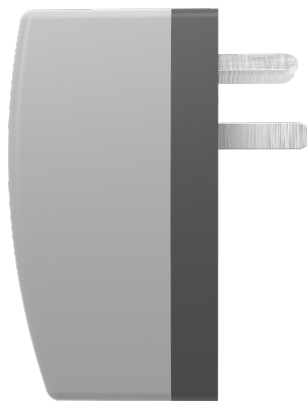
CARACTERÍSTICAS GERAIS

- 10A - 2200W.
- Corte instantâneo em alta tensão.
- Corte retardado em baixa tensão (7 segundos).
- Relé controlado.
- Reconexão automática.
- Supressor transiente de linha.
- 3 indicadores luminosos para o Status Operacional.

GENERAL FEATURES

- 10A - 2200W.
- Instant high-voltage cutting.
- Delayed low-voltage cutting (7 seconds).
- Relay controlled.
- Automatic reconnection.
- Line transient suppressor.
- 3 light indicators for the Operating Status.

Minimun dimensions (mm)	85x55x45
Output voltage	180 - 242 Vca
Power	2 KVA resistive 1KVA inductive
Minimal response time	50 msec
Reconnection delay	2 min
Frequencies	50/60 Hz

STANDARD VERSION

NOTAS - ANOTAÇÕES - NOTES

DIBUJO - DESENHO - DRAW
